PLUSSOUND

CUSTOM BLUETOOTH CABLES

QUICK START GUIDE

Thank you very much for your purchase

You are the owner of the highest quality bluetooth cable on the market today. Every cable is designed and hand assembled in Los Angeles, California, USA and includes the following specifications:

**Bluetooth Version 5.0**

DAC-AMP Functionality

Hi-Res Codecs

Proprietary UPOCC Type 6 Litz Wires

Balanced Output

In-House Designed Connectors
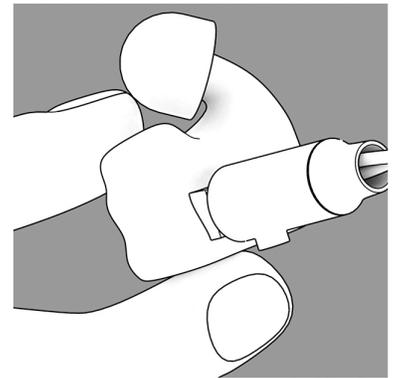
Built-In Microphone

USB Type C Connector

3 LEDs

Battery Life Indicator

Multi-button Commands

Custom Cable Styles

INSTALLATION

For earphones: Connectors with locking screws must have screws face outwards.
Connectors without locking screws and have heatshrinks must have the logos face outwards.
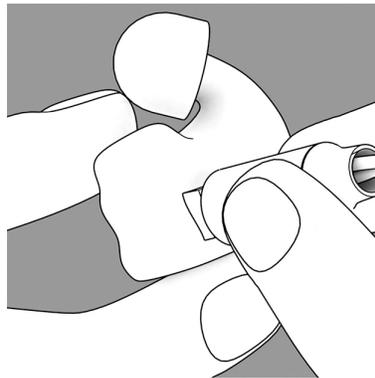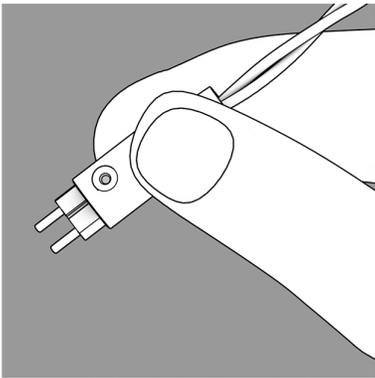
For headphones: Left and right is determined based on the specific indicator colors
you have chosen for your cable. Review order details if unsure.
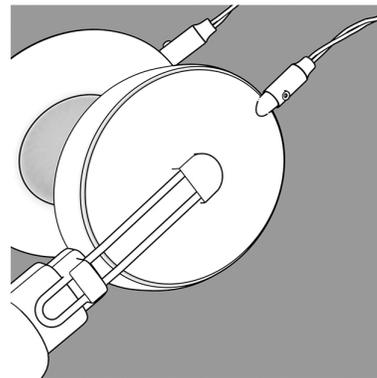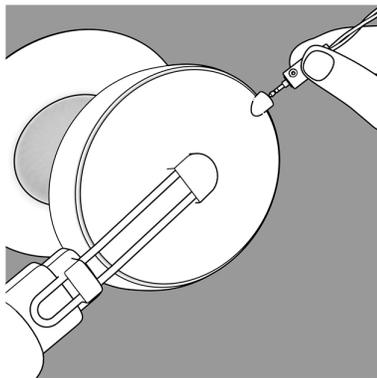
Once connected, avoid repeated removal and insertion of cable unless absolutely necessary.

Cable works best and last longer when it is not heavily abused, bent, pulled, twisted, or dropped.

H O W   T O   W E A R

Default: This style allows you to wear the cable and module in front of you or behind your head. Choose the best option based on your needs. Use the removable slider to adjust fit for better comfort.
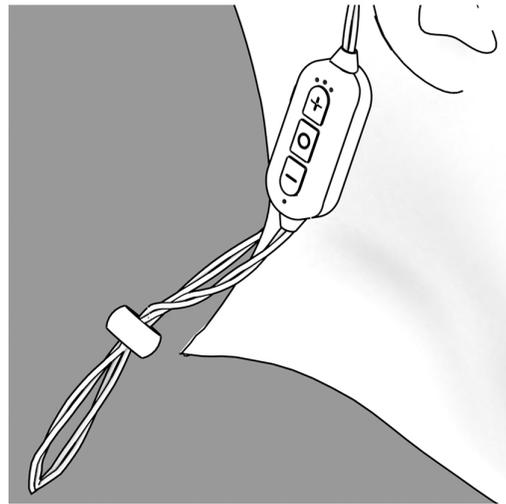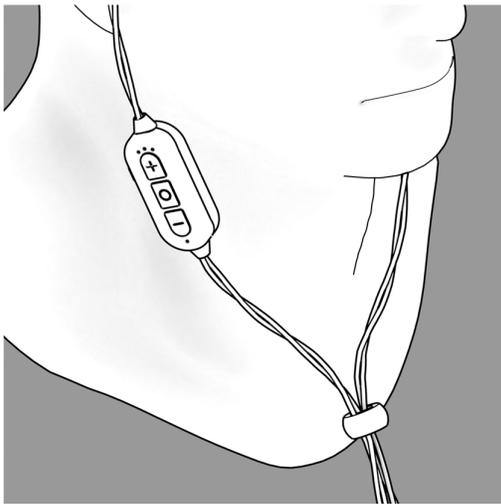
Pendant: This style is best worn in front of you for better access to all functions, including USB DAC/AMP functionality.

MODULE OVERVIEW

LED Indicators

\+ Button
(for Volume Up / Skip Forward)

O Button
(Multifunctional)

\- Button
(for Volume Down / Skip Backwards)

Microphone

Pair Button

Reset

USB Type C
(For Charge and DAC/AMP)
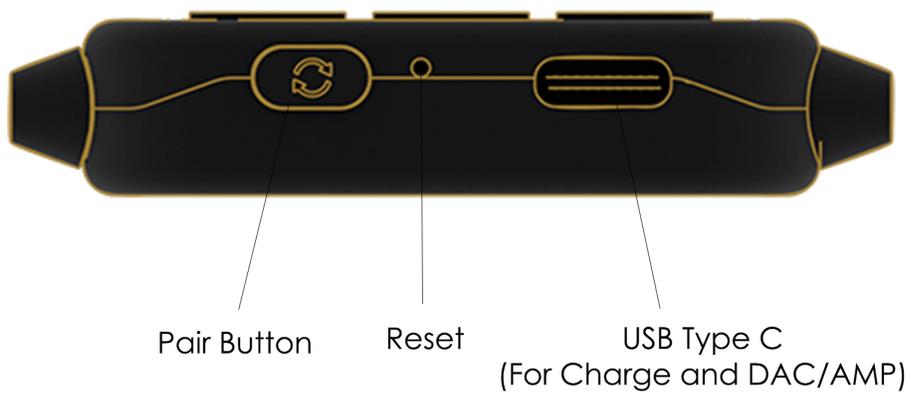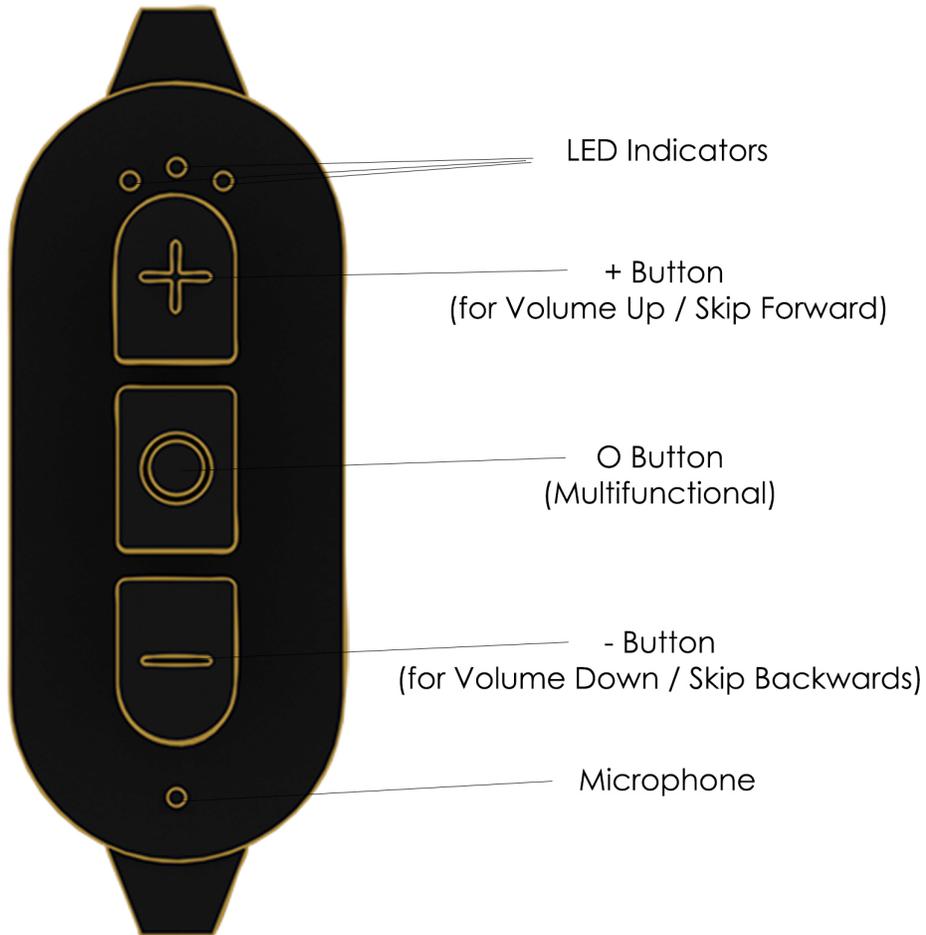
H O W T O O P E R A T E

1. To activate and search for new devices:
iDevices | Settings > General > Bluetooth > On
Android | Settings > Bluetooth > On > Scan for devices
Windows | Settings > Bluetooth > On
Mac | System Preference > Bluetooth > On
[Note: Steps can vary by device]

2. Hold down O button until LED 1 (Left) starts flashing red and blue to indicate POWER ON.

3. Once powered on, hold down PAIR button for two seconds. LED 2 (Center) will start flashing red and blue to indicate pairing mode for the first device.

4. 'PS-V3' will appear on the screen. Select device to accept pairing.
[Note: Enter 0000 in the event that your device asks for a passcode.]

5. Once paired, LED 2 will turn blue to indicate paired connection.

6. [Optional] **Hold PAIR button for two seconds again to connect a second device. LED 3 (Right) will flash instead and turn blue once connected.**

D A C / A M P

1. To activate function:
Windows | Settings > Audio
Mac | System Preference > Sound
[Note: Steps can vary by device]

2. Connect PS-V3 cable to computer via USB

3. Select 'PS-V3' for output.
[Note: If there is no audio, hold both PAIR and O buttons for two seconds to re-activate function.]

BUTTON COMMANDS

BLUETOOTH

Power:
Hold Down **O** to POWER ON
Hold Down **O** to POWER OFF

Pair:
Hold Down **PAIR** for Pairing Mode

Music/Applications:
Press **+** once for VOLUME UP
Hold **+** once for NEXT MUSIC TRACK
Press **-** once for Volume DOWN
Hold **-** once for PREVIOUS MUSIC TRACK
Press **O** once to PLAY MUSIC
Press **O** once to STOP MUSIC

Phone:
Press **O** once to ACCEPT CALL
Press **O** once to HANG UP
Hold **O** once to REJECT CALL
Hold **O** once to MUTE CURRENT CALL AND ACCEPT NEW CALL
Double Press **O** to REDIAL LAST CALL
Press **O** once to END CALL
Hold **O** for VOICE CONTROL

DAC/AMP

Press **+** once for VOLUME UP
Press **-** once for VOLUME DOWN
Press **O** once to PLAY MUSIC
Press **O** once to STOP MUSIC

Multi-button Functions:
Hold **+** and **-** for REMOVING PAIRING LIST
Hold **+** and **PAIR** to TURN ON/OFF LED LIGHTS
Hold **O** and **PAIR** to TURN ON/OFF USB AUDIO
HOLD **+**, **-**, and **PAIR** for DFU MODE

L E D   I N D I C A T O R S

LED 1 (LEFT):
Blue + Red flashing (1 sec) > POWERING ON
Blue + Red flashing (continuous) > POWERED ON AND NO PAIRED LIST
Red > CHARGING

LED 2 (CENTER):
Blue + Red flashing > PAIRING MODE
Red > NOT CONNECTED TO DEVICE
Blue > CONNECTED TO DEVICE

LED 3 (RIGHT):
Blue + Red flashing > PAIRING MODE
Red > NOT CONNECTED TO 2nd DEVICE
Blue > CONNECTED TO 2nd DEVICE

S U G G E S T I O N S

If you are using it for the first time, power on by holding down O button.
Once LED 1 is flashing blue and red, hold PAIR button for a few moments until LED 2 flashes
blue and red to enter pairing mode. Once you've connected your first device, hold PAIR button
again to pair your second device. Bluetooth cable can pair up to TWO devices.

If you already paired two devices and want to add a new device, you can hold + and -
to remove entire pair list to start a new list, hold PAIR button to only remove last used device, or
you can manually remove PS-V3 from your source under settings.

Prior to first use, we recommend charging your cable but you can pair and starting listening
immediately. Use the included type C to Type A cable or any cable, as long as it supports charge
and data functions. You may plug into computers, adapters, external battery packs, etc. You can
continue to use PS-V3 while it charges. [Note: If you do so, it may take a bit longer to fully charge.]

SAFETY PRECAUTIONS

Do not place very heavy objects over the cable and module.

Avoid places with moisture, dust, or smoke.

Never attempt to repair or open the module yourself. Doing so will void your warranty.
Contact PLUSSOUND if you have issues.

Avoid exposing the cable to direct sunlight or extreme temperatures.

Keep clean and store in cool area after each use.

Do not place cable near magnetic objects such as WiFi, TV, etc.

Never use chemical or cleaning products on the module or it will alter surface.

Avoid dropping or exposing module to strong vibrations.

If module gets wet (rain, water, chemical, etc.) do not power on and allow it to dry.
If it does not turn on, contact PLUSSOUND for instructions.

If you experience ringing in your ears, lower the volume or stop listening until it goes away.

Do not listen to music at excessive volume. Protect your ears.

Use in safe environments to avoid accidents.

Be aware of your surroundings especially outdoors while using this bluetooth cable.

Do not modify or tamper the module. This will avoid warranty and may result in unnecessary
damaging of components.

Turn off the power and set the volume of sources to a minimum when connecting
this cable.

Keep this product out of reach of small children.

SPECIFICATIONS

CABLE

Wire: UP-OCC
Configuration: Type 6 Litz
Size: 26 American Wire Gauge (AWG)

MODULE

Bluetooth Version: 5.0
Output Class: 2
Communication Distance: up to 10m
Frequency Band: 2.4GHz
Supported Codecs: SBC, AAC, aptX, aptX-LL, aptX-HD, LDAC
Corresponding Profile: A2DPv1.3, AVRCPv1.6, HSPv1.2, HFPv1.7

DAC/AMP

Supported Files: .mp3 to Hi-Res
Encoding: up to 24-bit
Sampling: up to 96kHz

WARRANTY

All bluetooth cables have a one-year warranty on parts and labor due to manufacturing faults from the date of original shipment. This warranty is available if purchased directly or from an authorized dealer or distributor. If the product is found to be defective, PLUSSOUND will repair or replace product at own discretion. PLUSSOUND, importer, and distributor shall not be liable for damages as a result of improper use or operation of this product. Wear and tear, loss, theft, misuse, abuse, or modifications performed by anyone other than PLUSSOUND are not part of the warranty. The user is responsible for following proper instructions and precautions provided in this guide. All information was written based on current product specifications. If you experience issues, you must visit the website at www.plussoundaudio.com and click on Information > Contact to fill out form or by email at sales@plussoundaudio.com.